



81 K

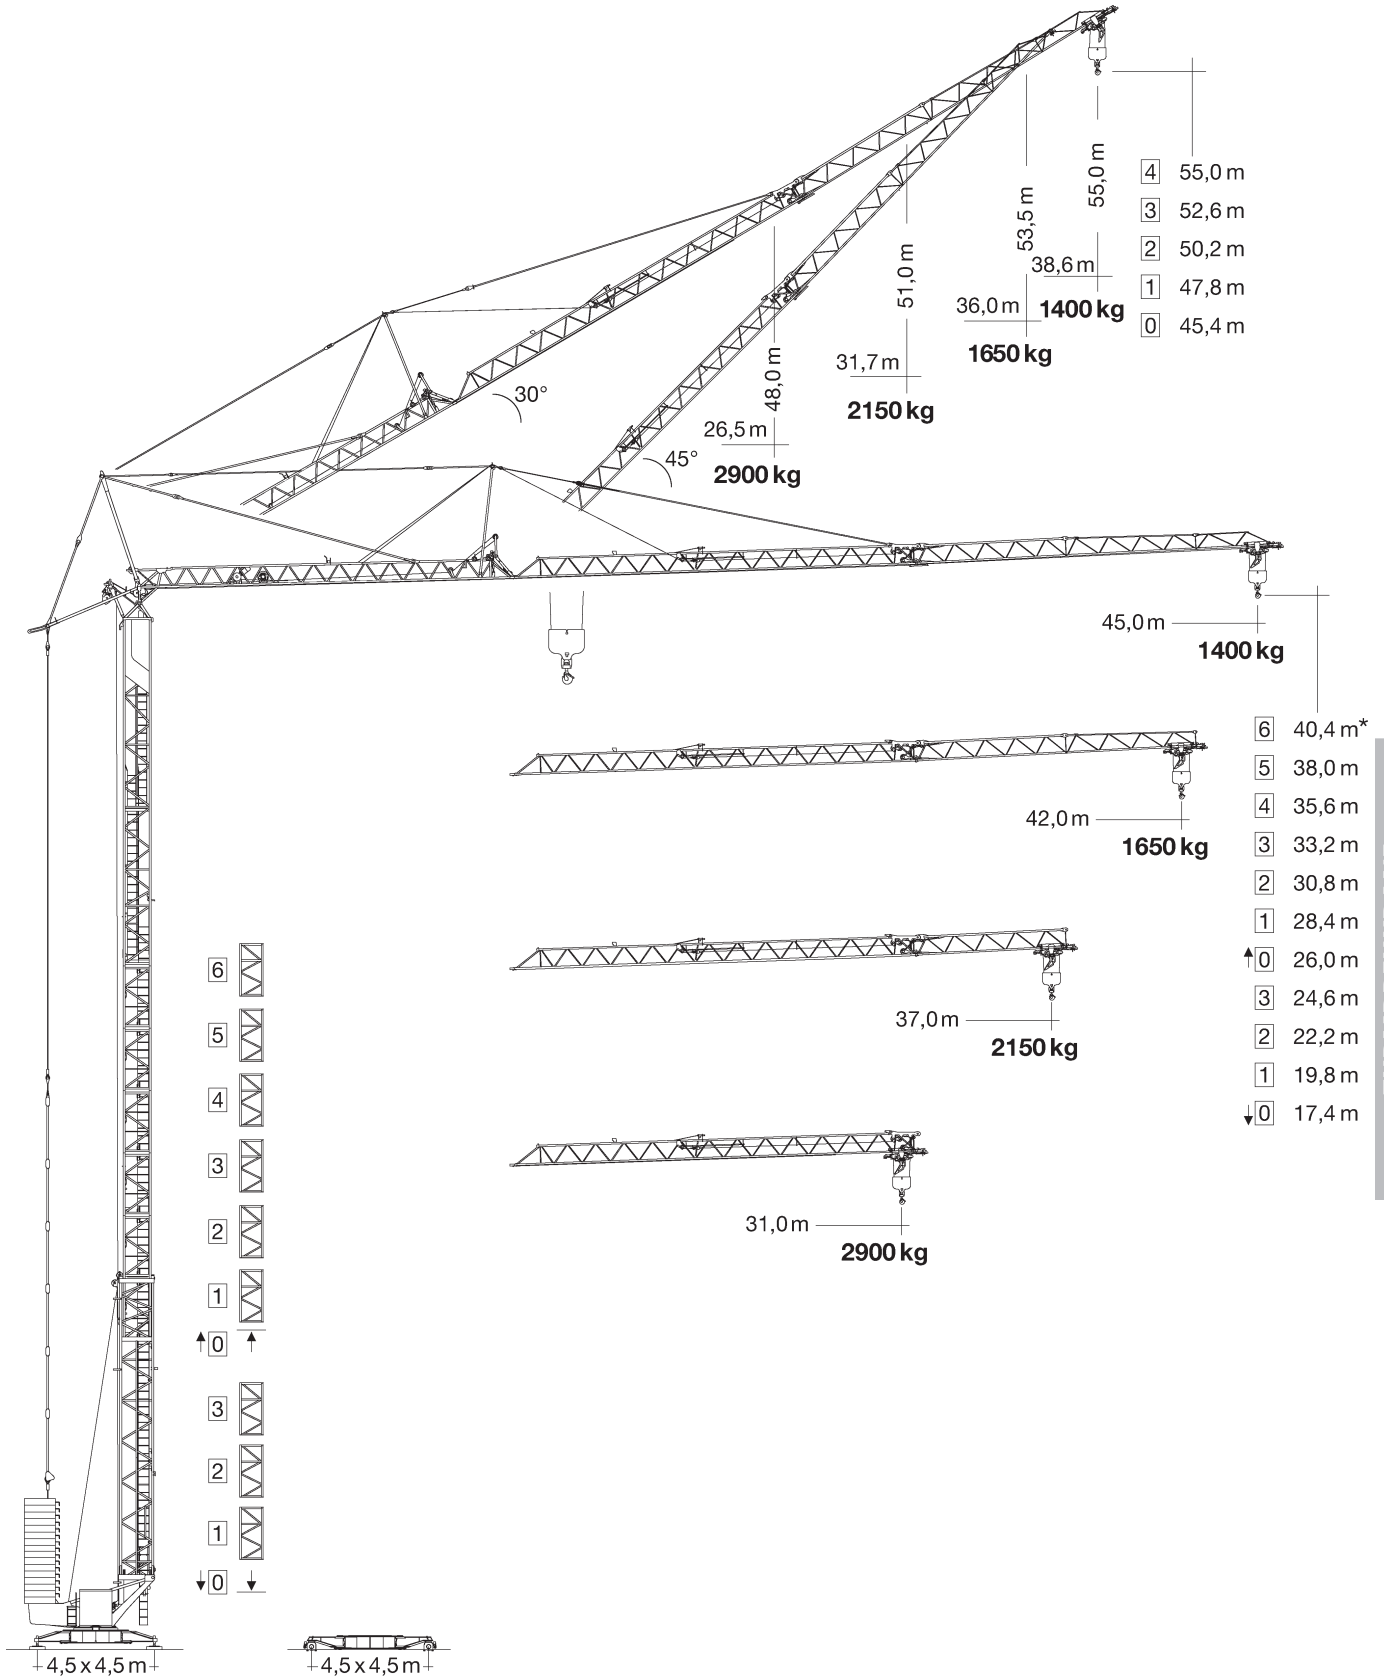

TURMDREHKRANE

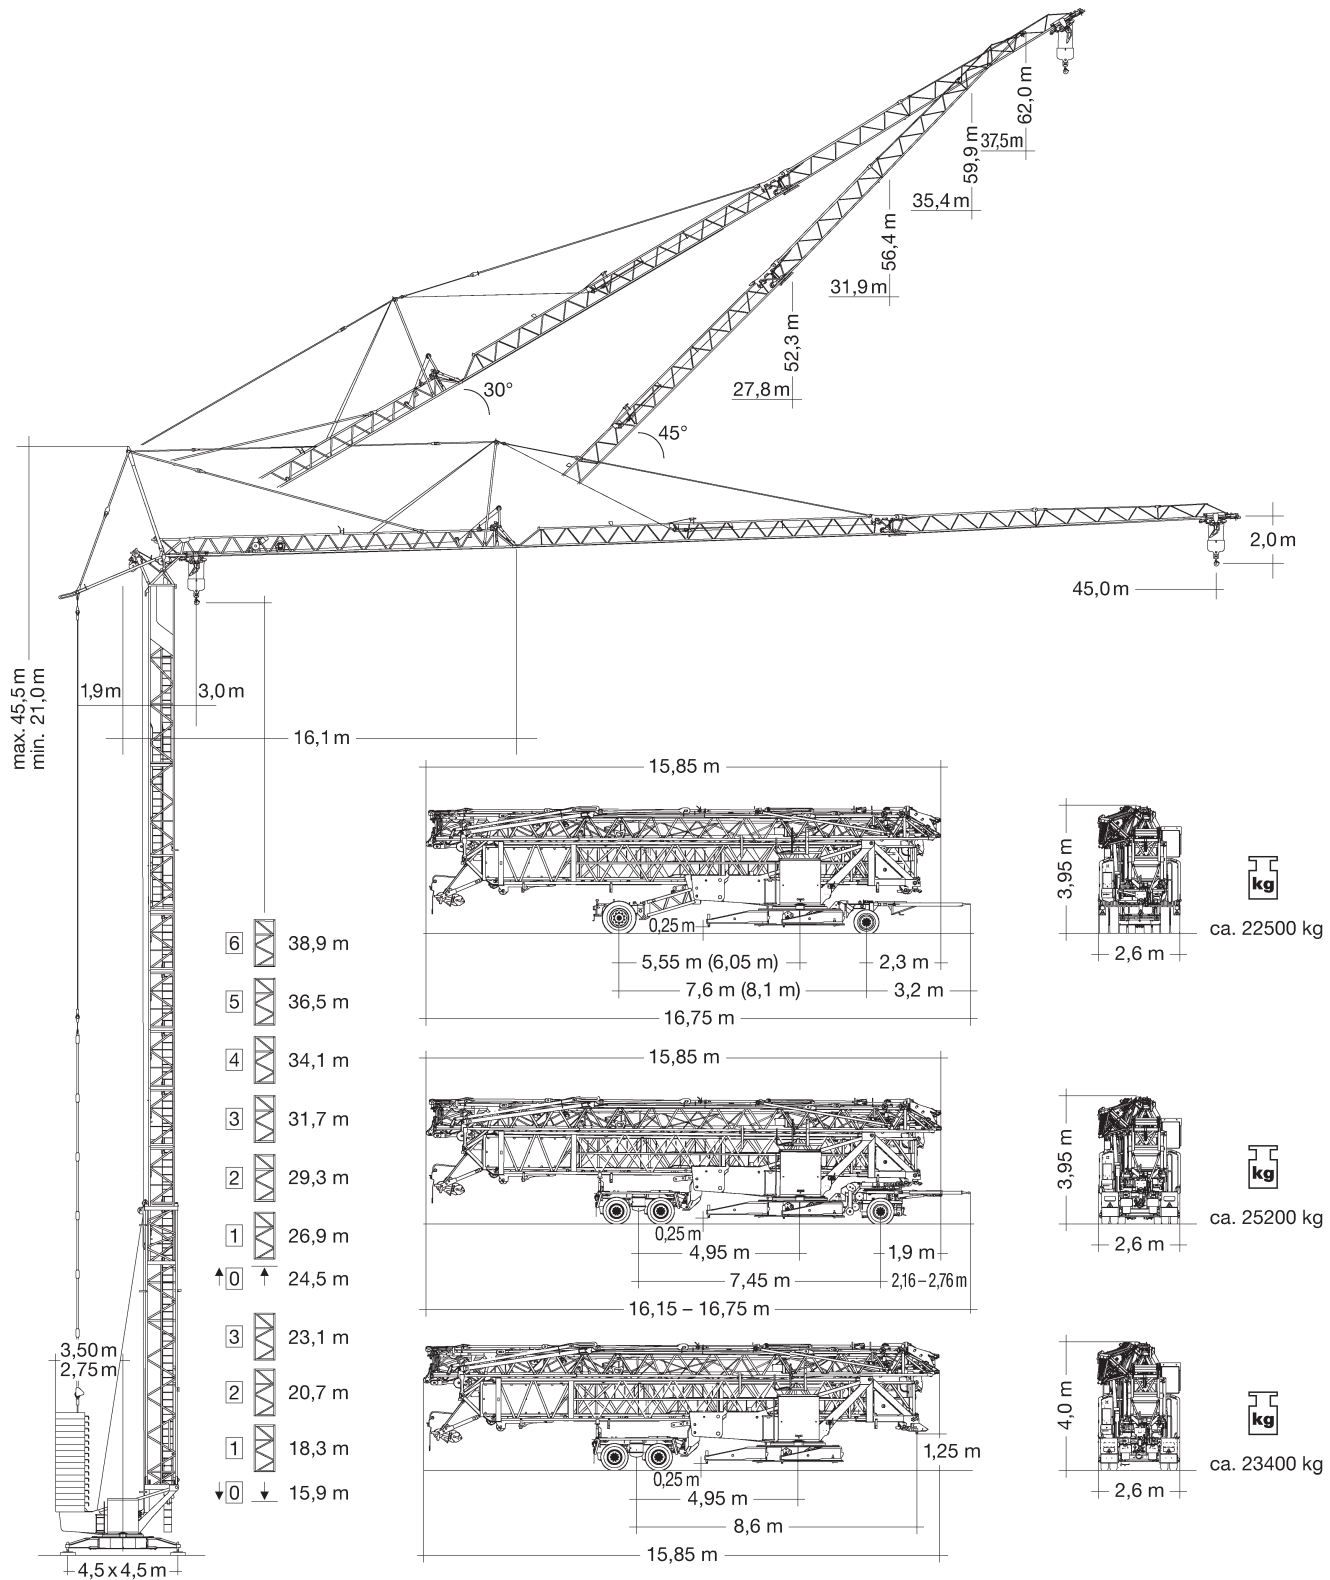

Gewicht

	r = 3,50 m	35000 kg		20000 kg
	r = 2,75 m	40000 kg		

* siehe Betriebsanleitung. / see instruction manual. / voir manuel de service. / vedi manuale d'istruzione. / ver manual de instrucción. / ver manual de instruções. / см. инструкцию по эксплуатации.

Ausladung und Tragfähigkeit

m	m/kg	m/kg															
		13,0	15,0	18,0	21,0	24,0	27,0	29,0	31,0	33,0	35,0	37,0	39,0	41,0	42,0	44,0	45,0
45,0	3,0 - 13,3 6000	6000	5220	4230	3540	3030	2640	2420	2230	2070	1920	1800	1680	1580	1530	1440	1400
42,0	3,0 - 14,1 6000	6000	5570	4520	3790	3240	2820	2590	2400	2220	2070	1930	1810	1700	1650		
37,0	3,0 - 15,1 6000	6000	6000	4930	4150	3560	3110	2870	2650	2460	2300	2150					
31,0	3,0 - 16,3 6000	6000	6000	5370	4520	3890	3400	3130	2900								

m	m/kg	Auslegersteilstellung 30° / Elevated jib 30° / Flèche inclinée 30° / Braccio inclinato a 30° Pluma inclinada 30° / Lança inclinada 30° / Положение стрелы под углом 30°															
		12,0	14,0	16,0	18,0	20,0	22,0	25,0	26,5	28,0	30,0	31,7	33,0	35,0	36,0	37,0	38,6
45,0	3,0 - 15,8 3000	3000	3000	2970	2730	2520	2340	2100	2000	1900	1790	1700	1640	1550	1500	1460	1400
42,0	3,0 - 17,7 3000	3000	3000	3000	2960	2740	2540	2290	2180	2080	1960	1860	1790	1700	1650		
37,0	3,0 - 21,2 3000	3000	3000	3000	3000	3000	2910	2630	2510	2400	2260	2150					
31,0	3,0 - 25,3 3000	3000	3000	3000	3000	3000	3000	3000	2900								

Antriebe

	0 ↔ 0,8 U/min. sl./min tr./min	5,0 kW FU
	0 ↔ 60,0 m/min	3,0 kW FU
	0 ↔ 25,0 m/min	2 x 2,2 kW FU
	0 - 45°, 110 sec.	3,0 kW FU


	↔ stufenlos / stepless / régl. continu régl. progressive / sin escalones sem degraus / бесступенчатый
15,0 kW FU WIW 210 MZ 404	kg m/min
	Gang Speed Vitesse Marcia Velocidad Velocidade Передача
	1 6000 0 ↔ 12,0 400 0 ↔ 70,0
<p>1 Gang / Speed / Vitesse Marcia / Velocidad Versnelling / Передача</p>	

BGL		C.0.08.0080
------------	--	-------------

	400 V	Hz	kVA
87,0 m	4 x 6 mm ²	50/60	21,0 FU

Aufstellvorgang

- ① **Standard Aufstellkurven von 1 bis 6 Turmstücken** / Standard erecting curves from 1 to 6 tower sections / Courbes de montage standard de 1 à 6 éléments de mât / Curve di montaggio standard con 1 fino a 6 elementi torre / Curvas de montaje estándar (1-6 tramos de torre) / Curvas padrão de montagem de 1 até 6 segmentos de torre / Стандартная монтажная высота с 1-6 башенными секциями
- ② **Erhöhte Aufstellkurve (+4,5 m) am Beispiel von 6 Turmstücken** / Elevated erecting curve (+4,5 m) using the example of 6 tower sections / Courbe de montage élevée (+4,5 m) en prenant pour exemple 6 éléments de mât / Elevata curva di montaggio (+4,5 m), come per esempio con 6 elementi di torre / Curva de montaje elevada (+4,5 m): ejemplo con 6 tramos / Curva elevada de montagem (+4,5 m) como exemplo para 6 segmentos de torre / Увеличенная монтажная высота (+4,5 м) на примере 6-ти башенных секций

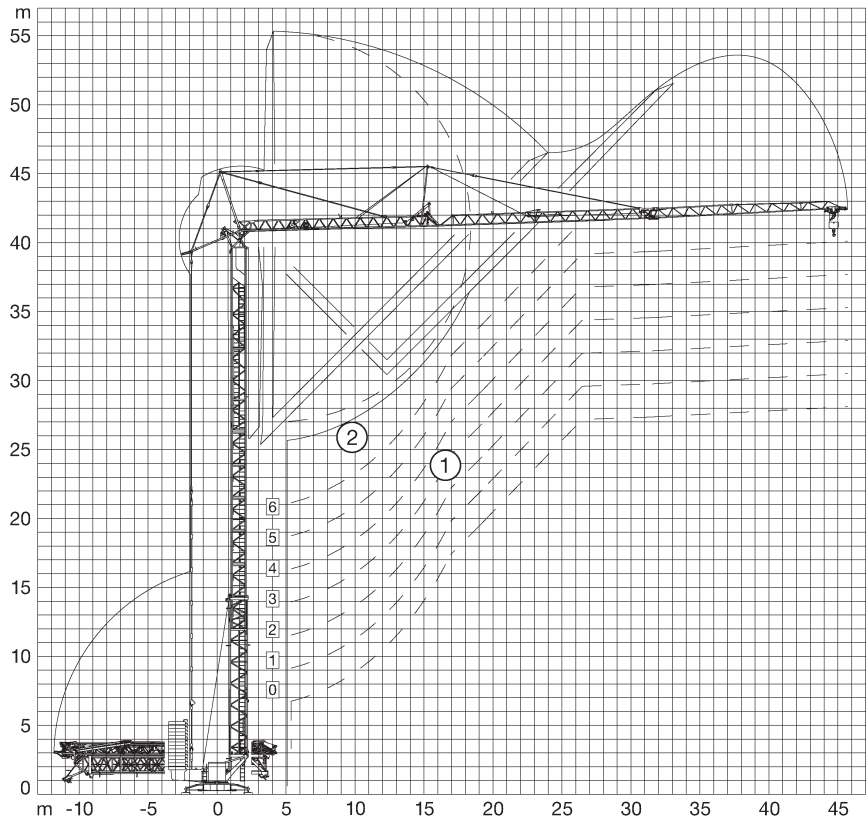

Kolli-Liste

Pos. Item Rep. Voce Pos. Ref. Pos.	Anz. Qty. Qte. Qta. Cant. Cant. Cant.					L (m)	B (m)	H (m)	kg	
1	4									
2	2*									
3	1									
4	1									
5	1									
6	1									
7	1									
8	1									
9	1									
10	1									
11	1									

Konstruktionsänderungen vorbehalten! / Subject to alterations! / Sous réserves de modifications! / Riservato il diritto di modifiche strutturali! / Sujeto a modificaciones! / Salvo modificação da construo! / Права на внесение конструкторских изменений сохраняются!

Sämtliche Angaben erfolgen ohne Gewähr. / This information is supplied without liability. / Ces renseignements sont sans garantie. / Tutte le indicazioni fornite senza garanzia. / Declinamos toda responsabilidad derivada de la información proporcionada. / Declinamos qualquer responsabilidade quanto à informação fornecida. / Все данные указаны без обязательств.